



Data Sheet

Digital Isolated Transmitter
Model OMX 380iDU

Distributed by

BRISTOL
||| INSTRUMENTS

[www. BristolInstruments.com](http://www.BristolInstruments.com)

Bristol Instruments
90 Canal Street, 4th Floor
Boston, MA 02114

Toll free
877-866-8500



OMX 380iDU



- Input for potentiometer
- Output 0/4...20 mA/0...5 mA/0...2/5/10 V/±10 V
- Rate up to 7200 meas./s
- Teach-in, Digital filters, Tare, Linearization
- Quick configuration by DIP switch
- PC configurable via USB port
- Galvanic separation 2.5 kVAC
- Power supply 10...30 VDC/24 VAC

Option


Data output

The OMX 380i model series are very fast DIN rail mountable digital transmitters with a Teach-in function.

Type OMX 380iDU is a isolated transmitter for potentiometers. Setting of both the input and output ranges can be done conveniently by a DIP switch located on the side of the housing or from a PC via the OM Link SW.

This device is based on a 32-bit processor, fast 24-bit $\Delta\Sigma$ ADC with PGQ and 16-bit DAC, which guarantees high accuracy and excellent stability.

DIGITAL ISOLATED TRANSMITTER

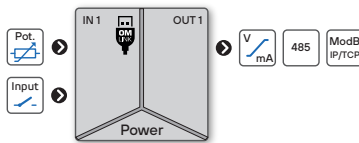

OPERATION

The device can be configured either by DIP switches located on the side of the housing or by PC using the OM Link SW. The same SW can be used to edit and archive all device settings, as well as to perform firmware updates and customer calibration. A standard microUSB cable is required for PC to device connection.

Tech-in process can be performed for the measuring range currently selected using the front panel buttons.

All settings are stored in the EEPROM memory (preserved even after power-off).

OPTION

DATA OUTPUTS are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS485 with ASCII protocol.

STANDARD FUNCTIONS

PROGRAMMABLE INPUT

Standard setting: any display values can be assigned to Min and Max values of a defined standard input signal

Teach-in: any display values can be assigned to Min and Max values of actual (unknown) input signal

Manual setting: known Min and Max input signal values can be entered manually and any display values can be assigned to each signal

ANALOG OUTPUT

Type: isolated, programmable with a resolution of 16 bit, rate < 160 μ s

Ranges: 0...2/5/10 V/±10 V, 0...5 mA/0/4...20 mA

FUNCTIONS

Linearization: non-linear signal is converted by a 100-point linear interpolation

Tare: designed to reset display upon non-zero input signal

Fixed tare: fixed preset tare

Min./max. value: registration of min./max. value reached during measurement

Simulation: test mode in which range, value and duration of the step can be set

Math functions: polynomial, inverse polynomial, logarithm, exponential, power, root

DIGITAL FILTERS

Floating average: from 2...30 measurements

Exponential average: from 2...100 measurements

Arithmetic average: from 2...100 measurements

Rounding: setting a „shorter“ number for further signal processing

EXTERNAL CONTROL

Hold: display/instrument blocking

Lock: control keys blocking

Tare: activation and tare resetting

Resetting Min/Max: resetting min/max value

Hold Min/Max: start of a measurement to evaluate the Min/Max value

Sample: start of a one-time measurement

TECHNICAL DATA

INPUT

| | |
|------------------------|---|
| No. of inputs | 1 The range is selectable either by DIP switch or by OM Link free SW from PC |
| DU Sensor power supply | 2.5 VDC/3 mA, potentiometer resistance > 500 Ω |

EXTERNAL INPUT

| | | | | | | | | | | | | | | | | | | | | | |
|---------------|--|-----|----------------------|------|-----------------|--------|---------------|--------|---------------------------|------|--------------------|--------|----------------------------|---------|--------------------------|---------|--------------------------|---------|------------------------------|--------|------------------------|
| No. of inputs | 2, on contact | | | | | | | | | | | | | | | | | | | | |
| Function | <table border="0"> <tr> <td>OFF</td> <td>no function assigned</td> </tr> <tr> <td>TARE</td> <td>tare activation</td> </tr> <tr> <td>CL.TAR</td> <td>reset of Tare</td> </tr> <tr> <td>CL.M.M</td> <td>reset of Min./Max. values</td> </tr> <tr> <td>HOLD</td> <td>measurement paused</td> </tr> <tr> <td>SAMPLE</td> <td>take a one-off measurement</td> </tr> <tr> <td>HLD.MIN</td> <td>start measurement of MIN</td> </tr> <tr> <td>HLD.MAX</td> <td>start measurement of MAX</td> </tr> <tr> <td>HLD.M-M</td> <td>start measurement of MAX-MIN</td> </tr> <tr> <td>KEYLCK</td> <td>device buttons blocked</td> </tr> </table> | OFF | no function assigned | TARE | tare activation | CL.TAR | reset of Tare | CL.M.M | reset of Min./Max. values | HOLD | measurement paused | SAMPLE | take a one-off measurement | HLD.MIN | start measurement of MIN | HLD.MAX | start measurement of MAX | HLD.M-M | start measurement of MAX-MIN | KEYLCK | device buttons blocked |
| OFF | no function assigned | | | | | | | | | | | | | | | | | | | | |
| TARE | tare activation | | | | | | | | | | | | | | | | | | | | |
| CL.TAR | reset of Tare | | | | | | | | | | | | | | | | | | | | |
| CL.M.M | reset of Min./Max. values | | | | | | | | | | | | | | | | | | | | |
| HOLD | measurement paused | | | | | | | | | | | | | | | | | | | | |
| SAMPLE | take a one-off measurement | | | | | | | | | | | | | | | | | | | | |
| HLD.MIN | start measurement of MIN | | | | | | | | | | | | | | | | | | | | |
| HLD.MAX | start measurement of MAX | | | | | | | | | | | | | | | | | | | | |
| HLD.M-M | start measurement of MAX-MIN | | | | | | | | | | | | | | | | | | | | |
| KEYLCK | device buttons blocked | | | | | | | | | | | | | | | | | | | | |

INSTRUMENT SPECIFICATION

| | |
|-----------------|---|
| TC | 15 ppm/°C |
| Accuracy | ±0.01% of FS |
| Rate | 100...7 200 measurements/s <i>speed of 400 meas./s is with FFT signal filtering</i> |
| Latency | < 580 μs |
| Overload | 10x (t < 30 ms), 2x |
| Functions | Teach-in, tare, preset tare, min/max value, math. functions, delayed start, simulation |
| Digital filters | exponential / floating / arithmetic average, rounding |
| Math functions | polynomial / inverse polynomial / logarithm / exponential / power / root |
| Linearization | linear interpolation in 100 points <i>setup only via OM Link</i> |
| OM Link | company communication interface for operation, setting and update of instruments (microUSB) |
| Watch-dog | reset after 500 ms |
| Calibration | at 25°C and 40 % rh. |

ANALOG OUTPUT

| | |
|----------------|--|
| No. of outputs | 1 |
| Type | isolated, adjustable with 16-bit DAC, output type and range is selectable |
| TC | 15 ppm/°C |
| Non-linearity | 0.024 % from FS |
| Accuracy | ±0.02 % of FS ±0.03 % of FS ±0.05 % of FS 0...5 V 0...2 V / 0...5 mA |
| Rate | response to change of value < 160 μs |
| Ranges | 0...2 / 5 / 10 V, ±10 V, resistive load ≥ 1 kΩ 0...5 / 20 mA, 4...20 mA, comp. < 600 Ω/12 V Indication of broken current loop Indication of error message (output < 3.2 mA) |

DATA OUTPUTS

| | |
|----------------|--|
| No. of outputs | 1 |
| Protocol | ASCII, Modbus RTU / TCP |
| Data format | 8 bit + no parity + 1 stop bit |
| Rate | 300...230 400 Baud |
| RS 485 | isolated, addressing (max. 31 instruments) |
| Ethernet | 10/100BaseT, Modbus TCP/IP (Slave) |

POWER SUPPLY

| | |
|-------------|---|
| Range | 10...30 VDC / 24 AC, ±10 %, PF ≥ 0.4, I _{typ} < 40 A / 1 ms, isolated <i>Protection by fuse inside the device</i> |
| Consumption | < 1.4 W / 1.3 VA |

MECHANIC PROPERTIES


| | |
|--------------|-------------------------------------|
| Material | PA66, incombustible UL 94 V-0, blue |
| Dimensions | 25 x 79 x 90.5 mm (w x h x d) |
| Installation | to DIN rail 35 mm wide |

OPERATING CONDITIONS

| | |
|-----------------------|--|
| Connection | connector terminal blocks, section < 1.5 mm ² |
| Stabilization period | within 5 minutes after switch-on |
| Working temperat. | -20°...60°C |
| Storage temperat. | -20°...85°C |
| Working humidity | < 95 % r.v., non condensing |
| Protection | IP20 |
| Construction | safety class I |
| El. safety | EN 61010-1, A2 |
| Dielectric strength | 2.5 kVAC for 1 min. test between supply and input 2.5 kVAC for 1 min. test between input and outputs |
| Insulation resist.* | for pollution degree II, measurement cat. III power supply > 300 V (PI), 255 V (DI) Input/outputs > 300 V (PI) |
| EMC | EN 61326-1, Industrial area |
| Seismic qualification | IEC/IEEE 60980-344 Edition 1.0, 2020, par. 6, 9 |
| Mechanical resistance | EN 60068-2-6 ed. 2:2008 |

* PI - Primary insulation, DI - Double insulation

CONNECTION

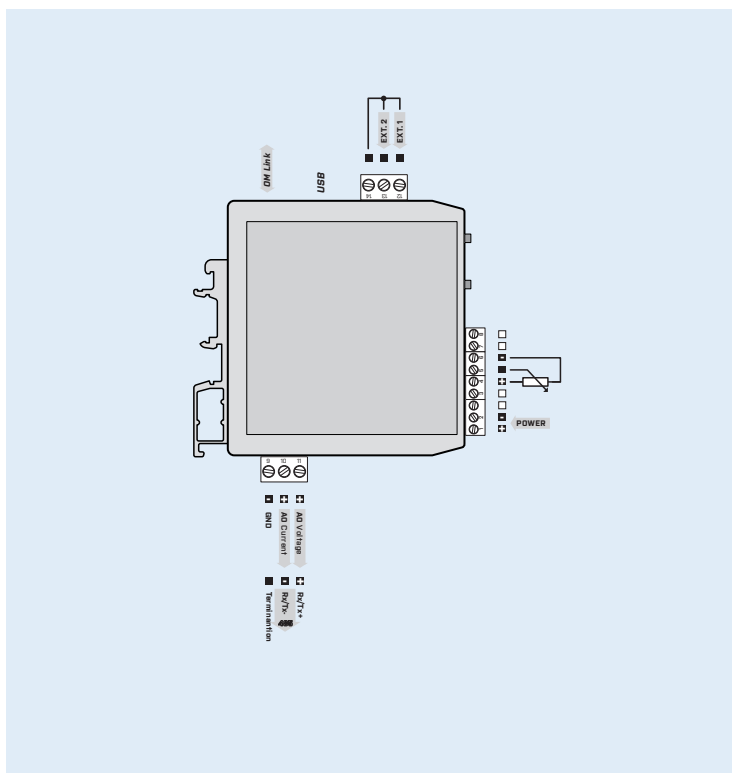

ORDER CODE

OMX 380iDU

- -

| | | |
|---------------|------------------------------------|-----------|
| Output | Analog | 1 |
| | Data - RS 485 | 2 |
| | Data - Ethernet | 3 |
| Specification | customized version, do not fill in | 00 |

Basic configuration of the instrument is indicated in bold.